

## ABS-IA-M3 - SW6 Abstandsbolzen




### Merkmale

- 6-kant Abstandsbolzen mit M3 Innen-/Außengewinde
- Schlüsselweite (SW) 6
- Außengewinde mit Hinterstich nach DIN76  
(kein Buchstabe "H" in der Art.-Nr. bedeutet "ohne Hinterstich")
- Material: Stahl verzinkt

### Abmessungen

► Einheit = mm

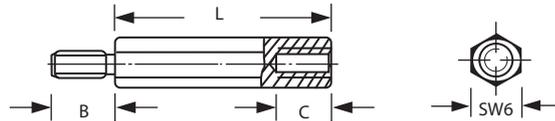

Art.-Nr.	L (mm)	B (mm)	C (mm)
102 03 05 H	5,0	6,0	3,0
102 03 06 H	6,0	6,0	4,0
102 03 08 H	8,0	6,0	6,0
102 03 10 H	10,0	6,0	6,0
102 03 11 H	11,0	6,0	6,0
102 03 12 H	12,0	6,0	6,0
102 03 12,5 H	12,5	6,0	6,0
102 03 13 H	13,0	6,0	6,0
102 03 13,5 H	13,5	6,0	6,0
102 03 14 H	14,0	6,0	6,0
102 03 15 H	15,0	6,0	6,0
102 03 16 H	16,0	6,0	6,0
102 03 18 H	18,0	6,0	6,0
102 03 20 H	20,0	6,0	6,0
102 03 22 H	22,0	6,0	6,0

Art.-Nr.	L (mm)	B (mm)	C (mm)
102 03 24 H	24,0	6,0	6,0
102 03 25 H	25,0	6,0	6,0
102 03 30 H	30,0	6,0	6,0
102 03 32 H	32,0	6,0	6,0
102 03 35 H	35,0	6,0	6,0
102 03 36 H	36,0	6,0	6,0
102 03 37 H	37,0	6,0	6,0
102 03 40 H	40,0	6,0	6,0
102 03 45 H	45,0	6,0	6,0
102 03 47 H	47,0	6,0	6,0
102 03 48 H	48,0	6,0	6,0
102 03 50 H	50,0	6,0	6,0
102 03 60 H	60,0	6,0	6,0
102 03 83 HB10	83,0	10,0	10,0

Weitere Abmessungen und Größen auf Anfrage, Tel.: 09852 61079-0