



# DIN6900 Kombischrauben



## Merkmale

- Kopfform: Linsenkopf DIN 7985
- Antrieb: Innensechsrund / Torx
- mit Federring ähnlich DIN 127/128 / DIN 6905 - Z4
- Material: Stahl 8.8
- Oberfläche: verzinkt

## Abmessungen ► Einheit = mm

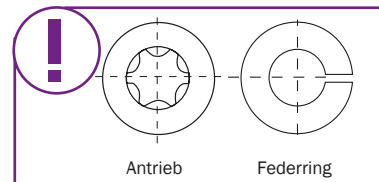

| Art.-Nr.    | Gewindegröße | Torx-Größe | L (mm) | Ø Kopf (mm) | H (mm) | Ø Federring (mm) | ähnlich DIN... |
|-------------|--------------|------------|--------|-------------|--------|------------------|----------------|
| 160 21 06 T | M2,5         | TX8        | 6,0    | 5,0         | 2,1    | 4,55             | 128            |
| 160 21 08 T | M2,5         | TX8        | 8,0    | 5,0         | 2,1    | 4,55             | 128            |
| 160 23 05 T | M3           | TX10       | 5,0    | 6,0         | 2,4    | 5,6              | 127            |
| 160 23 06 T | M3           | TX10       | 6,0    | 6,0         | 2,4    | 5,6              | 127            |
| 160 23 08 T | M3           | TX10       | 8,0    | 6,0         | 2,4    | 5,6              | 127            |
| 160 23 10 T | M3           | TX10       | 10,0   | 6,0         | 2,4    | 5,6              | 128            |
| 160 23 12 T | M3           | TX10       | 12,0   | 6,0         | 2,4    | 5,6              | 127            |
| 160 23 16 T | M3           | TX10       | 16,0   | 6,0         | 2,4    | 5,6              | 127            |
| 160 24 08 T | M4           | TX20       | 8,0    | 8,0         | 3,1    | 6,95             | 127            |
| 160 24 12 T | M4           | TX20       | 12,0   | 8,0         | 3,1    | 6,95             | 127            |
| 160 25 08 T | M5           | TX25       | 8,0    | 10,0        | 3,8    | 8,6              | 127            |
| 160 26 12 T | M6           | TX30       | 12,0   | 12,0        | 3,8    | 10,5             | 128            |