

RP Flachbandkabelferrit




Merkmale


- geschlossene Ausführung mit großem Volumen, dadurch besonders hohe Schirmdämpfungswerte

Abmessungen ► Einheit = mm

Figur 1

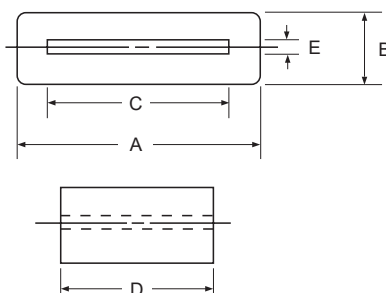

Figur 2









Figur 1

Art.-Nr.	Typ	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Impedanz Ω		max. Polzahl
							25 MHz	100 MHz	
601 02 65	RP-22,3x7,7x19	22,3	7,7	14,0	19,0	1,5	68	120	11
601 02 64	RP-21x6,8x15	21,0	6,8	15,0	15,0	1,3	60	75	11
601 02 60	RP-23,5x6,3x10	23,5	6,3	18,4	10,0	1,1	32	75	14
601 02 62	RP-45,1x12,5x28,6	45,1	12,5	34,5	28,6	1,5	80	165	27

Figur 2

Art.-Nr.	Typ	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Impedanz Ω		max. Polzahl
							25 MHz	100 MHz	
601 02 59	RP-28x7,7x14,6	28,0	7,7	23,0	14,6	1,4	38	85	18
601 02 67	RP-28x7,7x22	28,0	7,7	23,0	22,0	1,4	52	110	18



! Ausführliche Datenblätter auf Anfrage, Tel.: 09852 61079-0