


SA-5F-SMT Abschirmgehäuse

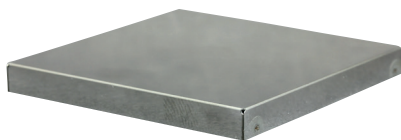


Merkmale

- Abschirmgehäuse (Abschirmhaube) 5-seitig, punktgeschweißt, für SMD-Bestückung
- Standardgrößen ohne Werkzeugkosten
- Materialstärke: 0,4 mm
- Material: Kupfer verzinkt

Abmessungen

► Einheit = mm

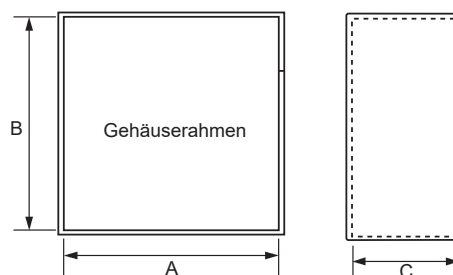

Art.-Nr.	A (mm)	B (mm)	C (mm)
622 12 01 SMT	20,0	20,0	2,5
622 12 02 SMT	20,0	20,0	5,0
622 12 03 SMT	20,0	20,0	10,0
622 12 04 SMT	30,0	20,0	2,5
622 12 05 SMT	30,0	20,0	5,0
622 12 06 SMT	30,0	20,0	10,0
622 12 07 SMT	30,0	30,0	2,5
622 12 08 SMT	30,0	30,0	5,0
622 12 09 SMT	30,0	30,0	10,0
622 12 10 SMT	50,0	25,0	2,5
622 12 11 SMT	50,0	25,0	5,0
622 12 12 SMT	50,0	25,0	10,0
622 12 13 SMT	50,0	50,0	2,5
622 12 14 SMT	50,0	50,0	5,0
622 12 15 SMT	50,0	50,0	10,0
622 12 16 SMT	75,0	50,0	5,0
622 12 17 SMT	75,0	50,0	10,0
622 12 18 SMT	75,0	50,0	15,0
622 12 19 SMT	75,0	75,0	5,0
622 12 20 SMT	75,0	75,0	10,0
622 12 21 SMT	75,0	75,0	15,0
622 12 22 SMT	100,0	50,0	5,0
622 12 23 SMT	100,0	50,0	10,0
622 12 24 SMT	100,0	50,0	15,0
622 12 25 SMT	125,0	75,0	10,0
622 12 26 SMT	125,0	75,0	15,0
622 12 27 SMT	125,0	75,0	25,0

! Ausführliche Datenblätter auf Anfrage, Tel.: 09852 61079-0

